

2000 Perimetral Sliding System

A perimetral sliding system with the possibility of straight, bevelled and curved sashes.



2000 Perimetral Sliding System

Transmittance

Uw from 2.9 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 17 mm.

Maximum acoustic insulation **Rw=33 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3

Water tightness
(EN 12208:2000): Class 8A

Wind resistance
(EN 12210:2000): Class C5
Reference test 1,20 x 1,20 m. 2 sashes






Sections

Frame 40 mm. 1 rail
40, 45, 60 & 70 mm. 2 rails
80 mm. 3 rails


Sashes 26 mm. (straight)
26 mm. (chamfered)
27,5 mm. (curve)

Profile thickness

Window 1,5 mm.

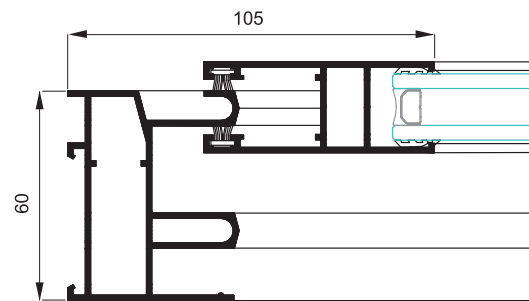

Opening possibilities

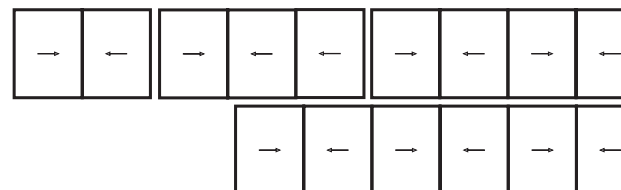

Sliding of 2, 3, 4 & 6 sashes.
Possibility of 3 rails.
Possibility of 1 rail.

Maximum dimensions

Width (L) = 3.200 mm.
Height (H) = 2.600 mm.
2 sashes window

Maximum weight/sash

100 Kg.

Please consult regarding maximum weight and dimensions for other opening types