

5000 Integral Sliding System

A sliding system that consists of a lateral frame and an incorporated shutter guide.



5000 Integral Sliding System

Transmittance

Uw from 2,4 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 18 mm.

Maximum acoustic insulation **Rw=34 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3

Water tightness
(EN 12208:2000): Class 8A

Wind resistance
(EN 12210:2000): Class C5
Reference test 1,20 x 1,20 m. 2 sashes





Sections


Frame 121 mm.
Sash 28 mm.

Profile thickness

Window 1,5 mm.

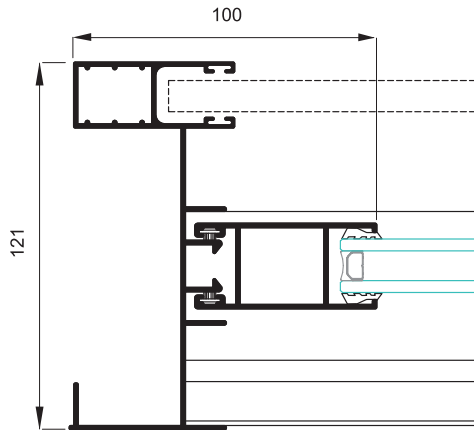

Opening possibilities



Sliding of 2, 3 & 4 sashes.

Maximum dimensions

Width (L) = 3.200 mm.
Height (H) = 2.600 mm.
2 sashes window

Maximum weight/sash

80 Kg.

Please consult regarding maximum weight and dimensions for other opening types