

5000 Double Sliding System with thermal break

A thermally broken double window sliding system and shutter guide inserted between the external and internal sashes.



5000 Double Sliding System with thermal break

Transmittance

Uw 1,4 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 18 mm.

Maximum acoustic insulation **Rw>40 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3

Water tightness
(EN 12208:2000): Class 8A

Wind resistance
(EN 12210:2000): Class C4
Reference test 1,25 x 1,50 m. 2 sashes



Sections


Frame 199 mm.

Sash 28 mm.


Polyamide strip length 16 & 20 mm.

Profile thickness

Window 1,5 mm.

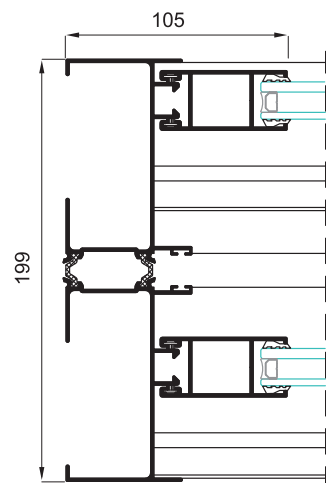

Opening possibilities



Slider of 2, 3 & 4 sashes.

Maximum dimensions

Width (L) = 3.200 mm.

Height (H) = 2.600 mm.

2 sashes window

Please consult regarding maximum weight and dimensions for other opening types

Maximum weight/sash

80 Kg.