

6200 Sliding System



6200 Sliding System

Transmittance

Uw from 4,2 (W/m²K)
Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 15 mm.
Maximum acoustic insulation **Rw=35 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)
Wood effect powder coating
Anti-bacterial powder coating
Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3
Water tightness
(EN 12208:2000): Class 7A
Wind resistance
(EN 12210:2000): Class C3
Reference test 1,12 x 1,15 m. 2 sashes





Sections


Frame 60 mm.
Sash 22 mm.

Profile thickness

Window 1,25 mm.

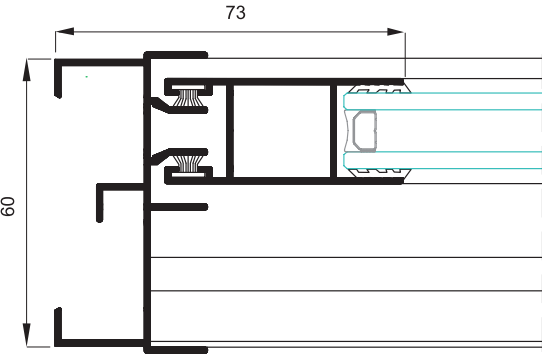

Opening possibilities

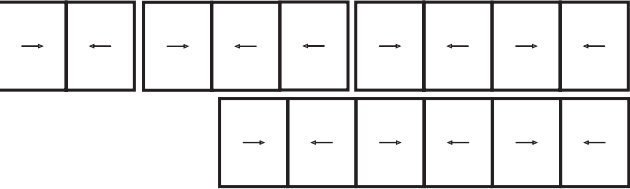

Sliding of 2, 3, 4 & 6 sashes.
Possibility of 3 rails.
Possibility of double window

Maximum dimensions

Width (L) =1.600 mm.
Height (H) = 1.600 mm.
2 sashes window

Width (L) =1.600 mm.
Height (H) =2.100 mm.
2 sashes balcony

Maximum weight/sash

80 Kg.

Please consult regarding maximum weight and dimensions for other opening types